


## Defender Assero™ Regenerative Media Filter

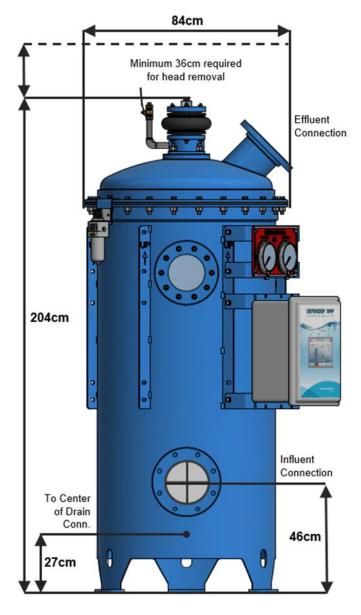

CAPACITIES & RATINGS							
	Filter Area (m²)	Min Flow (m³/h)	Max Flow (m³/h)	Volume (m³)			
SP-29-36-200	10.9	13.3	37.3	0.7			
SP-29-36-250	13.6	16.6	46.5	0.7			
SP-29-36-300	16.3	19.9	55.7	0.7			
SP-29-36-350	19.0	23.2	65.0	0.7			
SP-29-36-400	21.7	26.5	74.2	0.7			
SP-29-36-450	24.5	29.8	83.4	0.7			
SP-29-36-500	27.3	33.3	93.4	0.7			

CONNECTION SIZES & FOOTPRINT							
Х	Inlet/Outlet (mm)	Drain (mm)	Footprint (m²)	Perlite (kg)			
SP-29-36-200	80	80	0.9	4.0			
SP-29-36-250	100	80	0.9	5.0			
SP-29-36-300	100	80	0.9	6.0			
SP-29-36-350	100	80	0.9	7.0			
SP-29-36-400	150	80	0.9	8.0			
SP-29-36-450	150	80	0.9	9.0			
SP-29-36-500	150	80	0.9	10.0			

WEIGHTS				
	Head (kg)	Head & Tubes (kg)	Shipping (kg)	Operating (kg)
SP-29-36-200	77	159	333	1,021
SP-29-36-250	77	166	340	1,027
SP-29-36-300	77	172	347	1,034
SP-29-36-350	77	179	354	1,041
SP-29-36-400	77	186	361	1,048
SP-29-36-450	77	193	367	1,055
SP-29-36-500	77	200	374	1,061

Note 1: Installed height 204cm | Drain connection centerline 27cm

Note 2: Min/Max flow rates based on recommended filtration rate of 1.22-3.42 m³/hr/m²

Note 3: Consult Neptune Benson for applications outside recommended range

Note 4: All Defender Assero models NSF listed up to 4.89 m<sup>3</sup>/hr/m<sup>2</sup>

Note 5: Inlet & outlet connection sizes based on 3.0 mps max pipe velocity

Note 6: Perlite media volume produces 3mm cake for optimal performance

Note 7: Additional sizes of Defender® filters available in standard or reduced height





334 Knight St Ste 3100 Warwick, RI 02886 USA

+1-800-832-8002 (toll-free) +1-401-821-2200 (toll)

evoqua.com

Defender, Defender Assero and Neptune-Benson are trademarks of Evoqua Water Technologies LLC, its subsidiaries or affiliates in some countries. All other trademarks are those of their respective owners.

All information presented herein is believed reliable and in accordance with accepted engineering practices. Evoqua makes no warranties as to the completeness of this information. Users are responsible for evaluating individual product suitability for specific applications. Evoqua assumes no liability whatsoever for any special, indirect or consequential damages arising from the sale, resale or misuse of its products.