

INDUSTRIAL UV SYSTEMS

# OptiVenn™ Series

High performance, cost-effective system for stringent Industrial applications

 Aquafine™





## Redefining Flexibility, Reliability and Robustness for Industrial Ultraviolet (UV) Water Treatment.

The OptiVenn Series is a family of robust and flexible UV Systems with advanced technology designed to meet the stringent requirements of Pharmaceutical, Food & Beverage, Microelectronics and other Industrial Markets.

The treatment chamber is constructed of 316L SS with two finish options. The control panel is constructed of 304 SS and is equipped with a Universal Controller which provides control, monitoring and operational information in a single convenient location.

The treatment chamber and control panel are extremely compact, yet offer flexibility of installation to accommodate into different skid designs or as a stand-alone UV System.

**MARKETS:** Food & Beverage, Life Sciences, Microelectronics, and General Industrial Applications

**APPLICATIONS:** Disinfection, Ozone destruction, and TOC reduction

## Introducing Aquafine OptiVenn

### **Compact Footprint.**

Optimized chamber design and multiple lamp arrays enable cost-effective installation in extremely compact spaces.

### **Proven, Robust Components.**

UV sensors, lamps, drivers and panels have demonstrated reliability worldwide in thousands of installations.

### **Flexible Panel Installation.**

All stainless steel enclosures provide maximum installation flexibility and are able to be mounted in different locations such as on the chamber or remotely to adapt to stringent space requirements.

### **Compact Chamber Design.**

The configurable treatment chamber makes it easy to fit the UV System into small spaces and tight pipe networks. The cylinder can be rotated to allow inlet and outlet connections at 4 different angles.

### **User-friendly Human Machine Interface (HMI).**

Intuitive interface enables at-a-glance system status checks.

### **Improved Lamp Technology.**

Low-pressure high-output lamp (LPHO) technology provides increased process performance and extended lamp life.

### **Delivering Water Confidence and Comprehensive Warranty.**

Aquafine UV Systems include a Lifetime Performance Guarantee and industry-leading warranties for systems and parts.

### **Global Support. Local Service.**

A comprehensive network of certified service providers offer fast response for spare parts and service.

## Ultraviolet (UV) Technology in Your Treatment Process

Ultraviolet (UV) light is a versatile, reliable, chemical-free approach to address numerous requirements in industrial water treatment.

### UV for Broad-based Disinfection


- Inactivates bacteria, viruses and chlorine-resistant protozoa
- 254 nm UV penetrates the cell wall of microorganisms, attacking DNA genetic material and preventing replication
- Disinfection is typically characterized as a 3-log reduction of microorganisms, and is based on a dose of 30 mJ/cm<sup>2</sup> at the end of lamp life

### UV for TOC Reduction

- 185 nm UV at a minimum dose of 90 mJ/cm<sup>2</sup>\* creates powerful hydroxyl radicals that oxidize total organic carbon (TOC) molecules
- UV can be used together with Deionization (DI) and Reverse Osmosis (RO) to reduce TOC to levels below 1.0 ppb

### UV for Ozone Destruction

- Residual ozone (O<sub>3</sub>) is efficiently removed by UV at a wavelength of 254 nm
- Ozone absorbs the UV energy and quickly breaks down to dissolved oxygen (O<sub>2</sub>)
- Typically 1.0 ppm of ozone can be reduced to less than 0.1 ppm with a UV dosage of 90 mJ/cm<sup>2</sup>

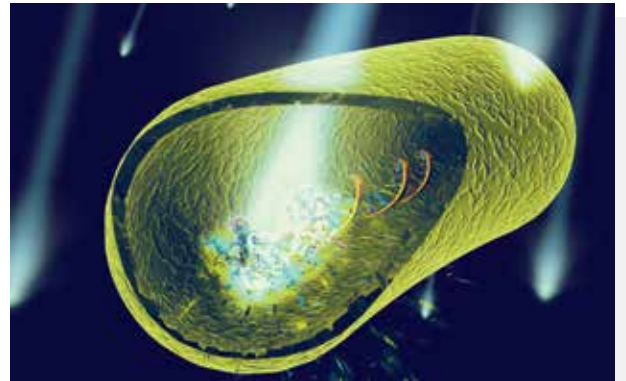

UV light attacks the microorganisms genetic material (DNA) preventing replication and infection.

## Aquafine Performance Guarantee and Support

As an added incentive to keep your Aquafine equipment operating at its optimum level, Aquafine provides a Lifetime Performance Guarantee for the equipment. A Lifetime Performance Guarantee means that the UV system will achieve the targets for which it was designed and sized on the original sales order of the equipment, which considers operational parameters such as UVT of the fluid, maximum flow rate, operating pressure, fluid temperature, among others.

A Lifetime Performance Warranty will only be applicable with the use of genuine OEM replacement parts. This guarantee is valid for the life of the equipment and it is available for both new and existing equipment when applicable conditions are met.

Customer support is available from our Authorized Distributor Network and from our 24/7 Technical Service Group. For questions regarding your application needs, please contact your local Authorized Distributor or Aquafine for more information.



\*Required dose may vary depending on application. Please contact Aquafine for proper sizing.

# System Design


## Flexible Treatment Chamber Requires Less Space

### Benefits:

- An internal baffle and an anti-vibration mechanism optimize treatment performance, support quartz sleeves and ensure reliable system performance even at high flow rates.
- The UV System can be installed with the chamber easily rotated to one of 4 different angles (12, 3, 6 and 9 o'clock position). No special customization is required.
- The flexible chamber, enabling rotation, reduces pipework, elbows, space and installation costs
- Inlet and outlet connections are always at the same angle



Chamber with panel mounted on the front and connections related to the back

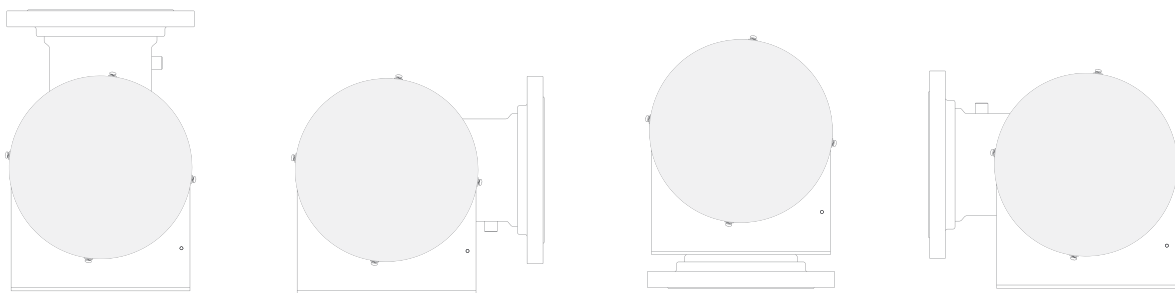

## Universal Enclosure Provides Installation Flexibility

### Benefits:

- All UV Systems have a stainless steel enclosure designed to provide maximum installation flexibility and fit within stringent space requirements.
- All enclosures are compliant with the following electrical codes: cULus (Canada, USA), CE (Europe), CCC (China) and KC (South Korea).

	Standard Enclosure	Optional Enclosure
<b>Systems with 4 lamps or less</b> Size (HxWxD) in (cm) Shape	Stainless Steel UL Type 1 (IP50) No need for fan or A/C 16x14x6 (41x36x15) Flat Top Mount on chamber or remotely	Stainless Steel UL Type 4X (IP66) No need for fan or A/C 16x14x6 (41x36x15) Sloped Top Mount on chamber or remotely
<b>Systems with 5 to 8 lamps</b> Size (HxWxD) in (cm) Shape	Stainless Steel UL Type 1 (IP50) Includes fan 16x20x9 (41x51x23) Flat Top Mount on chamber or remotely	Stainless Steel UL Type 12/4X (IP54/66) Includes fan - Option for A/C 20x20x9 (51x51x23) Sloped Top Remote mount only
<b>Systems with more than 8 lamps</b> Size (HxWxD) in (cm) Shape	Stainless Steel UL Type 12/4X (IP54/66) Includes fan - Option for A/C 20x20x9 (51x51x23) Sloped Top Remote mount only	NA

## System Design

### Compact System Design to Preserve Space

#### Benefits:

- The panel can be mounted in different locations to optimize the use of space, especially for frame mounted designs.
- The small and medium enclosures can be mounted on top of the cylinder (between the inlet and outlet connection), in front of the cylinder or remotely up to 15 feet apart from the cylinder. The location of the panel can be easily changed at any point in time. It is recommended that the large panel be mounted remotely (not on the cylinder).



### User-Friendly HMI

#### Benefits:

- Intuitive interface enables at-a-glance check status of the system.
- Information displayed includes: individual lamp status, operational hours of the system and lamps, UV intensity and temperature condition of the chamber and control panel.
- A 4-20mA output signal is included with the UV monitoring option.
- Base model includes HOA (Remote Start and Stop) and LOA (Lamp Out Alert)



### New High Performance UV Lamps

#### Benefits:

- The LPHO lamps are approximately 3 times more efficient than medium pressure lamps, delivering most of the UV output in the germicidal absorbance curve peak. Low pressure lamps operate at a lower temperature than medium pressure lamps, which leads to less fouling and less maintenance requirements.
- The OptiVenn series lamps can restart immediately after a shut down (no cool down period required) which maximizes system uptime.



# OptiVenn™ Series // Disinfection

Model:	01CDS	03CDS	02CDM	02DDM	04CDM	04DDM	04CDL	04DDL	06DDL	08DDL	08EDL	08FDL	08GDL	10GDL	12GDL	12HDL
<b>Maximum Flow Rate</b>																
Flow rate (gpm)	12 gpm - 2,200 gpm*															
Flow rate (m³/hr)	2.7 m³/hr - 500 m³/hr*															
Number of UV lamps	1	3	2	2	4	4	4	4	6	8	8	8	8	10	12	12
<b>Electrical Requirements</b>																
Electrical supply	110V/60Hz-240V/50Hz, Single Phase, 2 W + Gnd															
Operating power (W)	50	150	265	265	530	530	670	670	985	1,300	1,300	1,300	1,300	1,600	1,920	1,920
<b>Treatment Chamber</b>																
Material of Construction	316L Stainless Steel															
Lamp Length - in (cm)	15 (38)			30 (76)				60 (152)								
Chamber diameter - in (cm)	6 (15)		8 (20)		6 (15)	8 (20)	6 (15)	8 (20)		10 (25)	12 (30)	14 (36)		16 (41)		
ANSI flanges size - in (cm)	2 (5)		3 (8)		4 (10)		6 (15)		8 (20)				10 (25)			
Optional - Tri-clamp size - in (cm)																
<b>Monitoring and Controls</b>																
Standard	Base Package: Lamp status indicator, System hours of operation, Lamp out alert (LOA) and Remote start/stop (HOA)															
Optional	UV Monitoring Package: UV intensity reading with NIST certified sensor															
<b>Control Panel</b>																
Standard	Rating, Material of Construction, Size (HxWxD) in (cm) Shape	UL Type 1, 304 Stainless Steel, 16x14x6 (41x36x15), Flat Top						UL Type 1, 304 Stainless Steel, 16x20x9 (41x51x23), Flat Top				UL Type 12-4X, 304 Stainless Steel, 20x20x9 (51x51x23), Sloped Top				
	Cooling Mechanism and Operating Temperatures °F (°C)	Convection, 34°-104°(1°-40°)						Forced Air, 34°-104°(1°-40°)				Forced Air, 34°-104°(1°-40°)				
Optional	Rating, Material of Construction, Size (HxWxD) in (cm) Shape	UL Type 4X, 304 Stainless Steel, 16x14x6 (41x36x15), Sloped Top						UL Type 12-4X, 304 Stainless Steel, 20x20x9 (51x51x23), Sloped Top				AC, 34°-104°(1°-40°)				
	Cooling Mechanism and Operating Temperatures °F (°C)	Convection, 34°-104°(1°-40°)						AC, 34°-104°(1°-40°)								
<b>Elastomers</b>																
Standard	EPDM															
Optional	Viton															
<b>Surface Finish</b>																
Standard	Ra32															
Optional	Ra15															
<b>Operating Conditions</b>																
Maximum water operating temperature F(C)	40°-104° (5°-40°)															
Maximum Operating Pressure PSI (BAR)	150 (10)															

# OptiVenn™ Series // TOC

Model:		04CTM	06CTM	08DTM	08DTL	10DTL	12DTM	12DTL
<b>Maximum Flow Rate</b>								
Flow rate (gpm)		6 gpm - 36 gpm*						
Flow rate (m <sup>3</sup> /hr)		1.4 m <sup>3</sup> /hr - 8.2 m <sup>3</sup> /hr*						
Number of UV Lamps		4	6	8	8	10	12	12
<b>Electrical Requirements</b>								
Electrical Supply		110-24 110V/60Hz-240V/50Hz, Single Phase, 2 W + Gnd 0V/50-60Hz, Single Phase, 2 W + Gnd						
Operating power (W)		530	795	1,060	1,300	1,625	1,800	1,920
<b>Treatment Chamber</b>								
Material of Construction		316L Stainless Steel						
Chamber Length - in (cm)		30 (76)			60 (152)		30 (76)	60 (152)
Chamber Diameter - in (cm)		6 (15)			8 (20)			
ANSI flanges size - in (cm)		3 (8)		4 (10)				
Optional - Tri-clamp size - in (cm)								
<b>Monitoring and Controls</b>								
Standard		Base Package: Lamp Status Indicator, System Hours of Operation, Lamp out alert (LOA) and Remote start/stop (HOA)						
Optional		UV Monitoring Package: UV Intensity Reading with NIST Certified Sensor						
<b>Control Panel</b>								
Standard	Rating, Material of Construction, Size (HxWxD) in (cm) Shape	UL Type 1, 304 Stainless Steel, 16x14x6 (41x36x15), Flat Top	UL Type 1, 304 Stainless Steel, 16x20x9 (41x51x23), Flat Top			UL Type 12-4X, 304 Stainless Steel, 20x20x9 (51x51x23), Sloped Top		
	Cooling Mechanism and Operating Temperatures °F (°C)	Convection, 34°-104° [1°-40°]	Forced Air, 34°-104°[1°-40°]			Forced Air, 34°-104°[1°-40°]		
Optional	Rating, Material of Construction, Size (HxWxD) in (cm) Shape	UL Type 4X, 304 Stainless Steel, 16x14x6 (41x36x15), Sloped Top	UL Type 12-4X, 304 Stainless Steel 20x20x9 (51x51x23) Sloped Top			AC, 34°-104°[1°-40°]		
	Cooling Mechanism and Operating Temperatures °F (°C)	Convection, 34°-104° [1°-40°]	AC, 34°-104°[1°-40°]					
<b>Elastomers</b>								
Standard		Viton						
<b>Surface Finish</b>								
Standard		Ra32						
Optional		Ra15						
<b>Operating Conditions</b>								
Maximum water operating temperature F(C)		40°-104° (5°-40°)						
Maximum Operating Pressure PSI (BAR)		150 (10)						

## Guaranteed Performance and Support Services

All of our systems come with a lifetime performance warranty. Global customer support is available from our Authorized Distributor Network and from our 24/7 Technical Service Group.

For questions regarding your application needs, please contact your local Authorized Distributor or Aquafine for more information.



---

**Aquafine is an ISO 9001 certified company. Aquafine equipment performance is guaranteed with the use of genuine OEM replacement parts.**

**North America & International** | 29010 Ave. Paine, Valencia, CA 91355 | P. +1 661 257 4770 F. +1 661 257 2489 | [www.aquafineuv.com](http://www.aquafineuv.com)  
**Europe** | Ramskamp 77-85 D-25337 Elmshorn, Germany | P. +49 4121 57806 13 F. +49 4121 57806 30 | [www.aquafineuv.com](http://www.aquafineuv.com)

© Aquafine Corporation 2018. All rights reserved. This document is not to be copied, electronically stored or reproduced without written permission from Aquafine Corporation. All specifications are subject to change without notice.

TSG 316A-18