

Lamp Type: GPH287T5LCA/CB-0A6


Spec Number:

2652


Engineering Specification Sheet

Lamp Diagram:


Four Pin Lamp

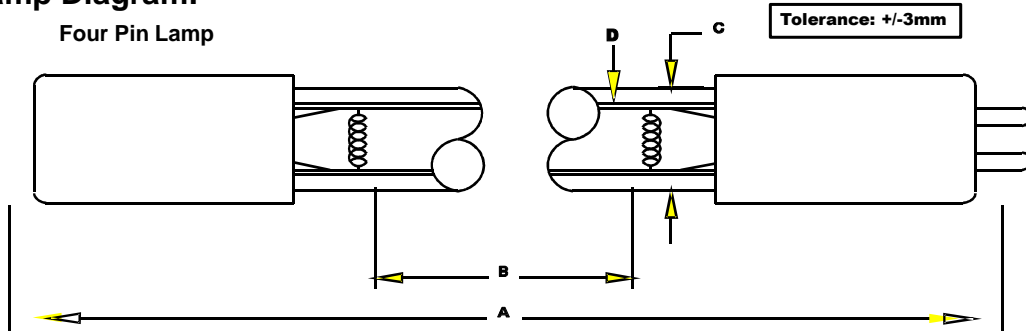

Left Base Diagram:  
A08-A7-C00 HD No Hole Base w/ Aqua Glaze

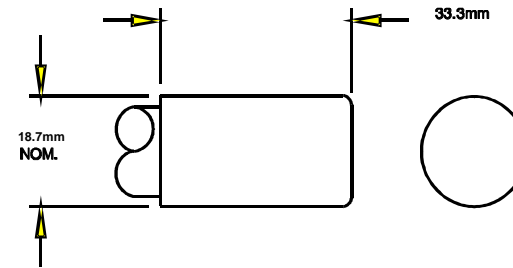

Right Base Diagram:  
A08-A6-CP0 HD Four-Pin Base w/ Aqua Glaze

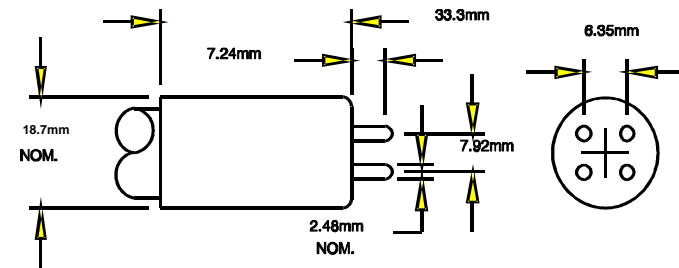

Pin: 08-PN-006

Lamp Characteristics

(A) Base Face:	287 mm	+/- 3		
(B) ARC:	211mm		Operating Current	380mA
(C) Bulb Diameter	15		Lamp Voltage:	39V
(X)			Lamp Wattage:	14W
Glass Type:	L (Non-Ozone)	Coating:	A11-QC-001	
<b>If Spliced:</b>	L	mm	VH	mm
	(Y)			
	(Y1)			

UV Output - Certified to be true. First Light Technologies, Inc.

Output UVC Watts	micro/watt	/cm^2 @ 1 Meter	Rated Life (hrs)	% Output @EOL	Output Notes Field	Ballast Used for Measurements
5		42	12000	80.00%		SSGPH287

**First Light**  
 212 Ideal Way  
 Poultney, VT 05764 USA  
 Phone-(802) 287-4195 Fax-(802) 287-4489  
 www.firstlightusa.com  
 email: sales@firstlightusa.com

\*UV Output is based on lamps measured after 100 hours of operation under lab conditions. These values are subject to wide variations under application/field conditions.  
 \*\*\*UV Output is measured at 254 nm\*\*\*  
 \*\*Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.

6/15/2022  
 12:32:30 PM

This data includes matters which are trade secrets of First Light Technologies, Inc., or Proprietary or Confidential to First Light Technologies, Inc. and shall not be reproduced or disclosed in whole or part, or used in any manner except in connection with First Light Technologies, Inc. business, without the written permission of First Light Technologies, Inc.