

Lamp Type: GPH436T5LCA/C

Spec Number:

3078

Engineering Specification Sheet

### Lamp Diagram:


Miniature Bi-Pin Lamp

Tolerance: +/-1.5mm

### Lamp Characteristics

(A) Base Face: 436 mm +/- 3  
(B) ARC: 360mm Operating Current 370mA  
(C) Bulb Diameter 15 Lamp Voltage: 67V  
(X) Lamp Wattage: 24W  
Glass Type: L (Non-Ozone) Coating: A11-QC-001  
If Spliced: L mm VH mm  
(Y)  
(Y1)


### Left Base Diagram: A08-73-CP0 HD Miniature Bi-Pin Base

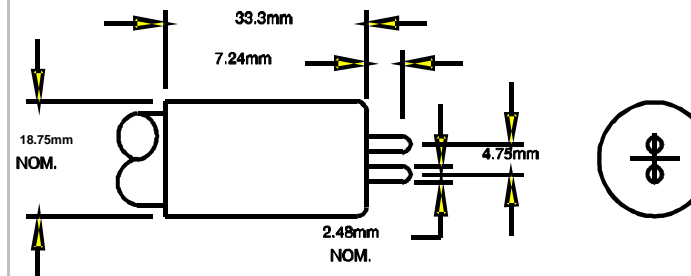

Pin: 08-PN-006

### Right Base Diagram:

A08-73-CP0 HD Miniature Bi-Pin Base

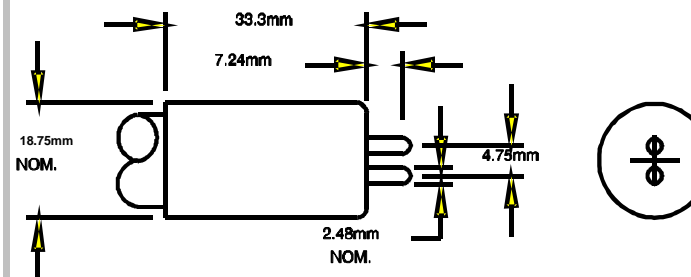

Pin: 08-PN-006

### UV Output - Certified to be true. First Light Technologies, Inc.

Output UVC Watts	micro/watt	/cm^2 @ 1 Meter	Rated Life (hrs)	% Output @EOL	Output Notes Field	Ballast Used for Measurements
8		72	12000	80.00%		TB-003



212 Ideal Way  
Poultney, VT 05764 USA  
Phone-(802) 287-4195 Fax-(802) 287-4489  
www.firstlightusa.com  
email: sales@firstlightusa.com

\*UV Output is based on lamps measured after 100 hours of operation under lab conditions.

These values are subject to wide variations under application/field conditions.

\*\*\*UV Output is measured at 254 nm\*\*\*

\*\*Rated Life is for reference purposes only and is based on a group of lamps operating under lab conditions. Actual life depends on the operating conditions of the lamp.

6/15/2022

12:38:01 PM

This data includes matters which are trade secrets of First Light Technologies, Inc., or Proprietary or Confidential to First Light Technologies, Inc. and shall not be reproduced or disclosed in whole or part, or used in any manner except in connection with First Light Technologies, Inc. business, without the written permission of First Light Technologies, Inc.