


Ionpure® LX-Z Continuous Electrodeionization (CEDI) Modules for Industrial Applications

IONPURE LX-Z—INDUSTRIAL CEDI MODULE

The Ionpure® LX-Z modules with improved chlorine tolerance are specifically designed for a wide range of industrial deionized water applications and markets, including boiler makeup water for power plants, water for hydrocarbon and chemical processing (HPI/CPI) and other high purity needs.

Ionpure CEDI modules provide a constant flow of high purity water without the need for downtime or chemical regeneration like conventional deionization methods.

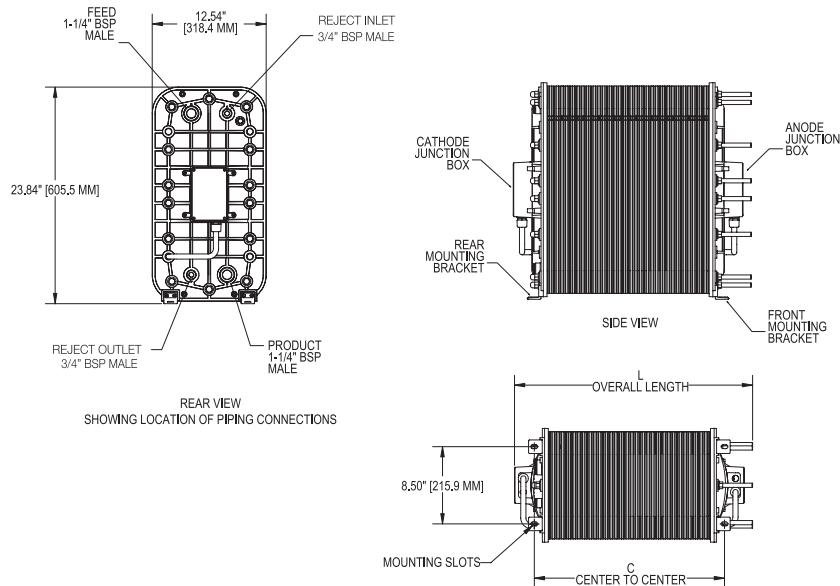

QUALITY ASSURANCE STANDARDS

CE marked. Each module is factory tested to meet strict industry standards and is manufactured in an ISO 9001 and ISO 14000 quality and environmental management system.

* Subject to terms of warranty



LX-Z SERIES FEATURES

- Wide range of flow from 0.22 m³/h (1 gpm) to 10m³/h (44 gpm) per module
- Significantly lower operating costs than conventional ion exchange
- Generates mixed-bed quality deionized water without the use of chemicals
- Continuous production instead of batch, with consistent quality
- Double O-ring seal guarantees* leak-free operation
- No need for acid/caustic, neutralization system or exchangeable DI tanks
- Resin filled concentrate for optimal performance and ease of operation
- Continuous operation
- Up to 0.05 ppm (total Cl₂) feed
- Wetted materials of construction comply with NSF® 14 and NSF® 61 requirements

OPERATING ENVIRONMENT

Installation should be indoors with no direct sunlight and should have a maximum ambient temperature of 113°F (45°C).

For additional information on our LX-Z industrial series of modules, call +1-866-876-3340 or visit our website at www.ionpure.com.

TYPICAL MODULE PERFORMANCE

Operating Parameters	
Recovery	90-95%
DC Voltage	0-400
DC Amperage	1.0-6.0
Product Water Quality	
Product Resistivity	Minimum Flow > 17 M Ω -cm** Maximum Flow > 7 M Ω -cm**
Silica (SiO ₂) Removal	90-99%, depending on feed conditions

* Actual performance may be determined using the IP-Pro projection tool available from Ionpure

† Performance based on maximum Feed Water Conductivity Equivalent (40 μ S/cm).

FEED WATER SPECIFICATIONS

Feed Water Conductivity Equivalent, including CO ₂ and Silica	< 40 μ S/cm
Feed Water Source	RO permeate
Temperature	5-45°C (41-113°F)
Inlet Pressure	1.4-6.9 bar (20-100 psig)
Maximum Total Chlorine (as Cl ₂)	< 0.05 ppm
Iron (as Fe)	< 0.01 ppm
Manganese (as Mn)	< 0.01 ppm
Sulfide (S ²⁻)	< 0.01 ppm
pH	4-11
Total Hardness (as CaCO ₃)	< 1.0 ppm
Dissolved Organics (TOC as C)	< 0.5 ppm
Silica (SiO ₂)	< 1.0 ppm

PHYSICAL SPECIFICATIONS

Item Number	L +/- 6.4 mm (0.25")	C +/- 3.2 mm (0.13")
LXM04Z	257 mm (10.12")	146.8 mm (5.78")
LXM10Z	347.7 mm (13.69")	235.7 mm (9.28")
LXM18Z	488.2 mm (19.22")	353.8 mm (13.93")
LXM24Z	601.7 mm (23.69")	442.7 mm (17.43")
LXM30Z	696.5 mm (27.42")	531.3 mm (20.92")
LXM45Z	907.3 mm (35.72")	747.7 mm (29.44")
LX8000Z	1062 mm (41.81")	888 mm (34.95")

LX-Z FLOW RANGE AND WEIGHTS

Ordering Part #	Model Number	Minimum Flow Rate m ³ /hr (gpm)	Design Flow Rate m ³ /hr (gpm)	Shipping Weight kg (lbs)**	Operating Weight kg (lbs)
W3T17286	IP-LXM04Z-5	0.22 (1.0)	0.44-0.67 (2.0-3.0)	59 (130)	31 (69)
W3T17291	IP-LXM10Z-5	0.57 (2.5)	1.1-1.65 (5.0-7.5)	78 (171)	51 (113)
W3T17297	IP-LXM18Z-5	1.02 (4.5)	2.0-3.1 (9.0-13.5)	99 (217)	74 (163)
W3T17303	IP-LXM24Z-5	1.36 (6.0)	2.8-4.2 (12.5-18.8)	115 (254)	92 (103)
W3T17312	IP-LXM30Z-5	1.70 (7.5)	3.3-5.11 (15.0-22.5)	132 (291)	110 (243)
W3T17314	IP-LXM45Z-5	2.57 (11.3)	5.1-7.67 (22.5-33.8)	205 (451)	157 (345)
W3T584543	IP-LX8000Z-5	3.13 (13.75)	7.5 - 10 (33 - 44)	225 (496)	190 (419)

** Includes shipping crate



210 Sixth Avenue, Suite 3300, Pittsburgh, PA 15222

+1 (866) 926-8420 (toll-free) +1 (978) 614-7111 (toll) evoqua.com

Ionpure is a trademark of Evoqua Water Technologies LLC, its subsidiaries or affiliates in some countries. All other trademarks of those of their respective owners.

All information presented herein is believed reliable and in accordance with accepted engineering practices. Evoqua makes no warranties as to the completeness of this information. Users are responsible for evaluating individual product suitability for specific applications. Evoqua assumes no liability whatsoever for any special, indirect or consequential damages arising from the sale, resale or misuse of its products.

© 2023 Evoqua Water Technologies LLC Subject to change without notice ION-LXZ-DS-0423