



OPTIMIZED TERTIARY FILTRATION

WOVEN STAINLESS STEEL DISC FILTER PANELS

Evoqua's woven optimum tertiary mesh (OTM) filter panel utilizes 316L stainless steel threads to create a weave that improves solids collection and rejection in the Forty-X™ Disc Filter. The panel configuration includes a robust, molded structural frame and a pressure-assisted seal allowing the panels to sustain and operate at a higher headloss and provides higher throughput when compared to other woven polyester flat panel disc filter designs.

INNOVATIVE DESIGN

The OTM disc filter panel is woven from 316L stainless steel threads which are attached to a polypropylene structural frame. The OTM media includes a porosity rating or percent open area of $\geq 60\%$ and a strength of 19-22 N/mm. Each panel is equipped with a molded EPDM edge gasket for a watertight seal between the OTM filter panel and the plastic filter support structure of the disc filter housing. The OTM panel is held in place with a molded plastic rim cap secured by conventional stainless steel hardware thereby allowing for easy maintenance and removal/replacement of the individual filter panels.



Woven stainless steel filter panels improve solids rejection.

Advantages


- 316L stainless steel optimum tertiary mesh (OTM) weave for greater hydraulic throughput.
- Superior solids capture and holding capacity
- Less frequent backwash cycles resulting in energy reduction.
- Less routine chemical cleaning.
- Ideal for various filtration applications

Filter Design Data

Filter Fabric	316L (Optimized Betamesh fabric)
Filter Disc Diameter	7.2 ft.
Filter Orientation	Inside-Out
Backwash Method	High Pressure Spray

PROVEN PERFORMANCE

The OTM woven stainless steel panel design has been engineered for municipal and industrial wastewater applications to maximize solids rejection and reduce backwash. The indirect flow through path of the OTM weave has the ability to hold more solids and reduces the chance of panel binding.

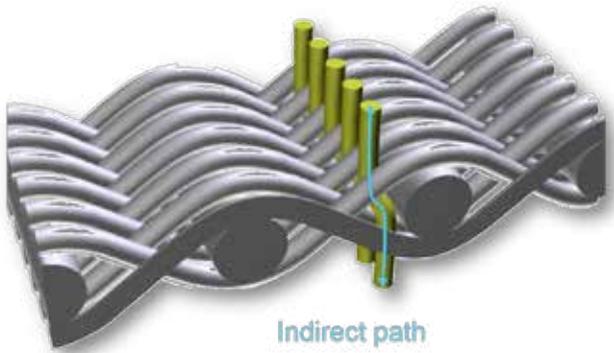

Extensive factory and field testing has proven the effectiveness and superior performance of the OTM stainless steel panel design. The chart below shows Turbidity testing results with flat panel polyester panels and Evoqua's OTM woven stainless steel panel design. This testing completed in conjunction with Emory University's wastewater treatment plant in September 2016 was for an application with very fine particulant.

Media Type	Filtered NTU
Baseline (No Media)	8.34
10 μ Polyester	5.16
15 μ Polyester	3.28
OTM 2 Woven Stainless Steel	1.55

** The OTM 2 woven stainless steel panel includes fabric for difficult fouling applications and for clean water.

APPLICATION EXPERIENCE

Evoqua's OTM panel is an ideal retrofit option for the Forty-X™ Disc Filter double plain weave pleated panels operating in harsh conditions. The OTM panel offers an option for municipal and industrial filtration applications that has not previously existed in barrier media filtration. The stainless steel OTM weave is dependable and provides a strong barrier for upset conditions which might involve organic and inorganic solids. The OTM filter panel is included as a standard feature in Evoqua's Forty-X™ Disc Filter Armor series design allowing for greater loading per square foot and fewer backwash cycles.

ABOUT US

Evoqua's DAVCO™ product line is dedicated to the advancement in disc filtration through ongoing research and development. Our industry leading expertise in wastewater filtration equipment design, steel fabrication, and field installation/construction services provide a single-source approach to municipal and industrial projects.

Learn more about Evoqua's Forty-X Disc Filtration systems at www.evoqua.com/forty-x.

DAVCO™
an EVOQUA brand



1828 Metcalf Ave, Thomasville, GA 31792

+1 (262) 547-0141 (toll) www.evoqua.com/forty-x

Forty-X is a trademark of Evoqua, its subsidiaries or affiliates in some countries.

All information presented herein is believed reliable and in accordance with accepted engineering practices. Evoqua makes no warranties as to the completeness of this information. Users are responsible for evaluating individual product suitability for specific applications. Evoqua assumes no liability whatsoever for any special, indirect or consequential damages arising from the sale, resale or misuse of its products.

© 2018 Evoqua Water Technologies LLC Subject to change without notice MU-FX-SSPanel-DS-0118