





All dimensions are in inches

A X B X C	Part #	"F"	"H"
6 x 3 x 3	1000-6583	9	4 1/2
6 x 4 x 3	1000-6584	9	4 1/2
6 x 4 x 6	1001-9890	11	8
6 x 5 x 3	1001-3404	9	4 1/2
8 x 4 x 3	1000-6585	11	4 1/2
8 x 4 x 4	1001-9885	11	6
8 x 5 x 3	1000-6586	11	4 1/2
8 x 5 x 4	1000-6587	11	6
8 x 5 x 6	1001-9889	11	8
8 x 6 x 3	1001-3914	11	4 1/2
8 x 6 x 4	1000-6588	11	6
10 x 5 x 4	1001-3405	12	6
10 x 5 x 6	1001-9886	12	8
10 x 6 x 4	1000-3406	12	6
10 x 6 x 6	1001-3407	12	8
10 x 8 x 4	1001-8716	12	6
10 x 8 x 6	1001-3918	12	8
12 x 6 x 6	1001-3408	14	8
12 x 6 x 8	1001-6163	14	8
12 x 8 x 4	1001-9888	14	6
12 x 8 x 6	1001-3117	14	8
12 x 8 x 8	1001-9881	14	8
12 x 10 x 6	1001-9882	14	8
12 x 10 x 8	1001-3964	14	8
14 x 8 x 6	1001-9884	16	8
14 x 8 x 8	1001-9883	16	8
14 x 10 x 8	1001-3409	16	8
14 x 12 x 8	1001-9880	16	8
16 x 8 x 8	1001-6254	18	8

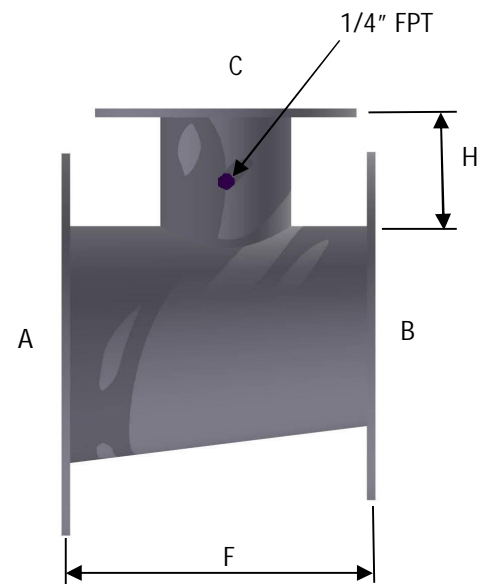

Flanges Meet ANSI Standard 125# Flange Drilling.
 "F" dimension $\pm 1/8$ ". Consult Neptune~Benson on specific fits.
 Install eccentric reducers with flat up, as detailed.
 Material: T316 Stainless Steel.
 Exterior of reducer including flanges shall have a bead blasted finish.

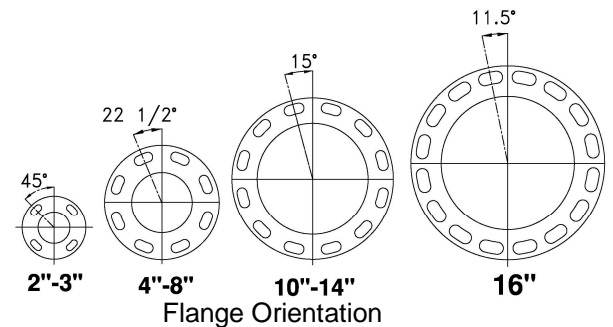

R 4/6/18