

VAF™ Auto Purge Valve



GENERAL INFORMATION

An automatic purge controller and valve can be used on all applications. This eliminates the need for manual flushing, turning the separator into an automatic system.

SPECIFICATION

- 115VAC 50/60Hz
- 3m (10ft) power cord with plug
- Two-piece brass ball valve
- 1" or 2" NPT connection
- Thermoplastic top cover
- Epoxy powder coated metal base
- NEMA 1 enclosure
- Ambient Temperature Range: -17°C (0°F) to 49°C (120°F)
- Maximum Working Pressure: 41 Bar (600psi)

FEATURES

- Power on LED
- External test button
- Tamper resistant settings
- Cycle Time: 30min to 30hrs
- Open Time: 5, 10, 15, or 20sec


CONTACT INFORMATION

Email: VAF@evoqua.com

Phone: +1 (303) 425-4242

www.vafusa.com

www.evoqua.com

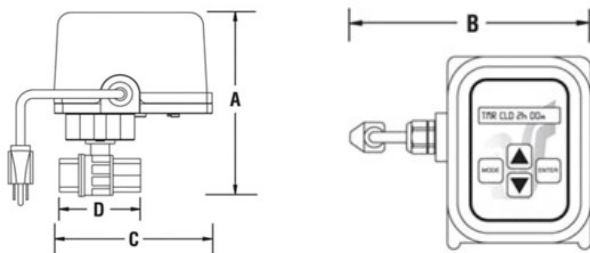

DIMENSION AND WEIGHTS (WITH STANDARD BRASS BALL VALVE)

VALVE CONNECTION SIZE		A	B	C	D	WEIGHT	
						KG	LB
1" NPT	CM	21.1	17.3	16.0	10.9	5.0	11.0
	IN	8.3	6.8	6.3	4.3		
2" NPT	CM	22.6	17.3	16.8	12.2	6.0	13.0
	IN	8.9	6.8	6.6	4.8		