



VAF™ FILTRATION SYSTEMS **SELF-CLEANING INTAKE SUCTION SCREENS**

GENERAL INFORMATION

When pumping water, it is important to keep equipment running smoothly and water flowing freely. Whether pumping water from a stream, canal, river, ditch, pit, sump, or pond, the water must be free of debris that could block water flow, damage the pump, clog water distribution equipment or damage process equipment.

The Self-Cleaning Intake Suction Screen utilizes a heavy 12, 18, or 24 mesh stainless steel screen designed to increase pump efficiency. The screen continuously removes debris from water. This saves energy and maintenance costs. The suction screens can be used in numerous applications with intake.

The suction screen is attached to the end of the pump at the water source. All water pulled in must traverse the screen before entering the intake pipe. The screen stops debris from entering and causing costly maintenance requirements in the system. The pump discharge return line drives two spray bars that continually rotate, jet water at the screen, and blast debris away from the screen at 2.8 to 4.5 bar (40 to 65 psi) operating range.

The suction screen has no exterior moving parts. It can be installed at any altitude without the operation being affected. The screen is corrosion resistant and also has a standard flanged connection. Other connections are available upon request.

Advantages

- Self-cleaning with very low maintenance requirements
- Construction Options: hot dip galvanized, epoxy coated carbon steel, and 304/316 combined
- Heavy duty, corrosion resistant construction for a long service life
- No exterior moving parts
- Hydraulically powered
- Simple installation
- Available in:
 - 12 mesh (1680 micron)
 - 18 mesh (1000 micron)
 - 24 mesh (710 micron)
- When combined with a V-Series™ automatic self-cleaning screen filter, any water source can be filtered down to 10 micron.


SUCTION SCREEN SPECIFICATIONS

MODEL	FLOW RATE 12 OR 18 MESH	FLOW RATE 24 MESH	LENGTH CM	DIAMETER CM	FLANGE SIZE CM	SPRAY M ³ /HR	OPERATING PRESSURE BAR	WEIGHT KG
	M ³ /HR	M ³ /HR						
IS-100	45	37	50.8	30.5	7.6	3		14
IS-200	74	51	63.5	40.6	10.2	4.5	3-4	26
IS-400	125	91	73.7	40.6	15.2	4.5		28
IS-600	170	119	83.8	61.0	20.3	4.5		46
IS-800	216	159	88.9	61.0	25.4	4.5	3.1-4.5	52
IS-1000	307	216	101.6	61.0	25.4	6.4		56
IS-1400	352	250	109.2	61.0	30.5	6.4		60
IS-1700	409	284	114.3	66.0	30.5	6.4		67
IS-2000	477	329	124.5	66.0	35.6	8.2		73
IS-2400	591	409	134.6	76.2	40.6	8.2	3.4-4.5	101
IS-3000	681	471	147.3	76.2	40.6	10		107
IS-3500	795	550	152.4	91.4	45.7	10		129
IS-4000	908	628	162.6	106.7	45.7	10		163

MODEL	FLOW RATE 12 OR 18 MESH	FLOW RATE 24 MESH	LENGTH IN	DIAMETER IN	FLANGE SIZE IN	SPRAY GPM	OPERATING PRESSURE PSI	WEIGHT LBS
	GPM	GPM						
IS-100	200	165	20	12	3	12		30
IS-200	325	225	25	16	4	20	40-60	58
IS-400	550	400	29	16	6	20		62
IS-600	750	525	33	24	8	20		102
IS-800	950	700	35	24	10	20	45-65	115
IS-1000	1350	950	40	24	10	28		123
IS-1400	1550	1100	43	24	12	28		131
IS-1700	1800	1250	45	26	12	28		148
IS-2000	2100	1450	49	26	14	36		160
IS-2400	2600	1800	53	30	16	36	50-65	223
IS-3000	3000	2075	58	30	16	44		236
IS-3500	3500	2420	60	36	18	44		283
IS-4000	4000	2765	64	42	18	44		358

NOTES:
 12 mesh = approximately 1680 micron, 18 mesh = approximately 1000 micron, 24 mesh = approximately 710 micron
 To specify construction selection, add G = Galvanized, E = Epoxy Coated, S = Stainless Steel (For Example: ISG-200)

TYPICAL APPLICATION

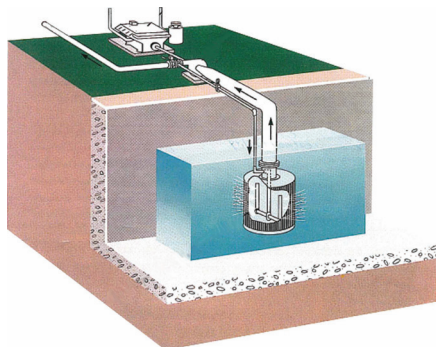

5270 Marshall St, Arvada, CO 80002 USA

Phone: +1 (303) 425-4242

Fax: +1 (303) 425-0112

www.vafusa.com

www.evoqua.com

STRAINER

An inline strainer or mini-filter is recommended in the 1.5" spray water supply line.

- 1.5" Solvent Weld Connections
Max Flow 16 m³/hr (70 gpm)
- 2" Solvent Weld Connections
Max Flow 23 m³/hr (100 gpm)




STRAINER

Models Available

Model	Part Number
1.5" Strainer	STR-IS-1.5-PVC
2" Strainer	STR-IS-2.0-PVC

SUCTION SCREEN FEATURES

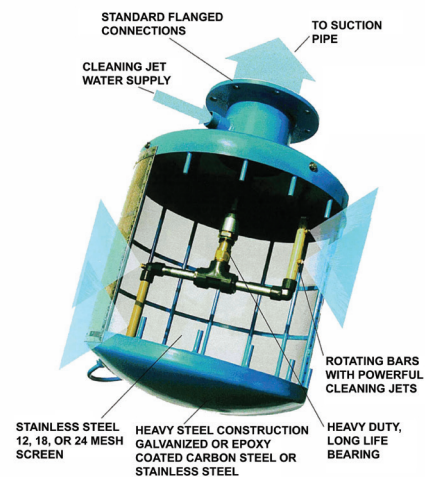

VAF and V-Series are trademarks of Evoqua, its affiliates and subsidiaries in some countries. Subject matter and images used with permission.

All information presented herein is believed reliable and in accordance with accepted engineering practices. Evoqua makes no warranties as to the completeness of this information. Users are responsible for evaluating individual product suitability for specific applications. Evoqua assumes no liability whatsoever for any special, indirect or consequential damages arising from the sale, resale or misuse of its products.

© 2018 Evoqua Water Technologies LLC

Subject to change without notice

VAF.SUCTIONSCRN.DS.0418